


PF1200-2402

1200 Watt 24V Front-End power Supply Module



Features:

- Small 1U High Package measuring only 10.25 x 4.83 x 1.60"
- Short Length of only 10.25" ideal for embedded applications
- Full Output Power over entire 90-264 VAC Input Range
- Optional 1U High 19" Rack-Mount Power Shelf
- Internal Oring FETS for Redundant Operation
- Active Digital Current Sharing
- I²C Interface and Analog Status & Control Signals
- Auxiliary Output Voltage (5VSB @ 250ma)
- Isolated Output may be referenced as positive or negative
- Active Power Factor Correction for EN61000-3-2 Compliance
- International Safety Standards & RoHS Compliant
- 2 Year Warranty

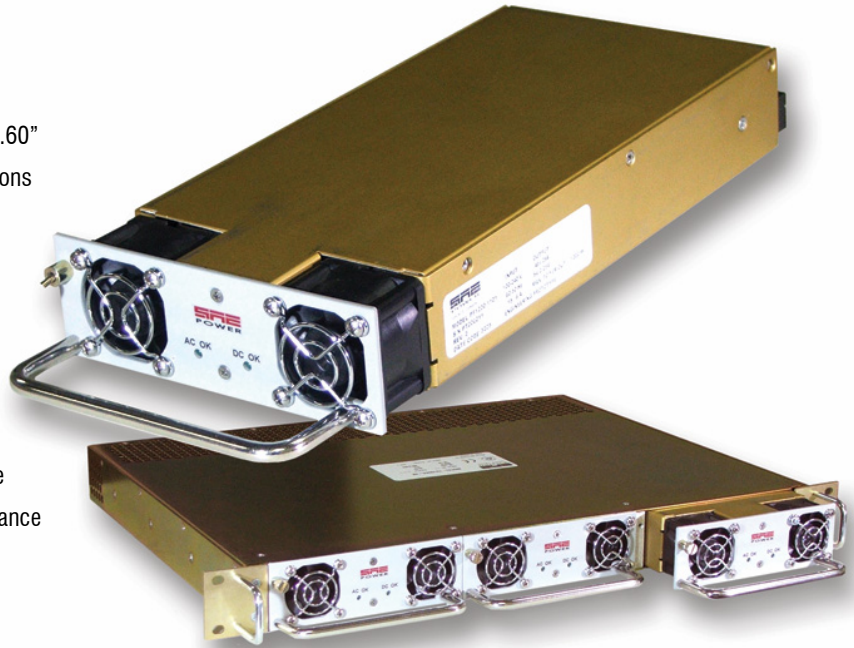

Input Specifications:

Input Range	Universal AC (90-264VAC / 47-63Hz)
Inrush Current	30 Amp Max (cold start)
Efficiency	88% Typical
Hold-Up Time	20ms (minimum)
Leakage Current	1mA rms
Harmonics	>0.98 Power Factor

Output Specifications:

Main Output	24V @ 50.0A
Auxiliary Output	5VSB @ 250mA
Regulation	±1% max (line, load & temp)
Ripple / Noise	±1%pk-pk max (20MHz)
OCP	>110%, auto-recovery
OVP	>115~125% of nominal

Status & Control Signals:

See Engineering Specification for complete details:

- Digital I2C Interface
- Remote Sense
- Voltage Adjust
- Fan Fail
- DC OK
- Enable / Inhibit
- Single Wire Parallel
- Current Monitor
- AC OK
- Over-Temp

Electromagnetic Compatibility:

ESD	EN61000-4-2, ±4KV Contact / ±8KV Air Discharge
Susceptibility	EN61000-4-3, 26-1000MHz, 10V/M, 80% AM
EFT / Bursts	EN61000-4-4, ±2KV
Surges	EN61000-4-5, ±2KV Line-Earth, ±1KV Line-Line
Immunity	EN61000-4-6, 0.15-800MHz, 10V, 80% AM
Voltage Dips	EN61000-4-100, 95% Dip & 10ms, 30% Dip & 500ms
Interruptions	EN61000-4-11, 95% reduction, 5s
Fluct / Flicker	EN61000-3-3

Environmental Specifications:

Operating Temp	-10~+50°C (De-Rate 2.5%/°C up to +70°C max)
Storage Temp	-40 ~ +85°C
Cooling	Internal Ball Bearing Fans with Temperature Speed Control
Humidity	20~90% RH (non-condensing)
Vibration	10~55Hz, 2G, 3min period, 60min each (3 axes)
Shock	20G Peak Acceleration
Reliability	250k Hours MTBF (Full Load & 25°C Operation)

Safety & Emissions:

- cTUVus En60950-1
- EN55022 Class B
- CE Mark (LVD)
- RoHS Compliance

Please see our website for the complete engineering specification. The information and specifications contained herein are subject to change without notice.

USA

1500 E. Hamilton Ave. #118
Campbell, CA 95008 USA
tel: 408.369.2200
fax: 408.369.4911

Canada

1810 Birchmount Road
Toronto, ON M1P 2H7
tel: 416.298.0560
fax: 416.298.0806

Hong Kong

CDW Bldg, Blk D, 22F, 388
Castle Peak Rd.
Tsuen Wan N.T., Hong Kong
tel: 2411 3623, 2411 3624

www.saepower.com

PF1200-2402

1200 Watt 24V Front-End power Supply Module




Ordering Information:

Part Number	Description
PF1200-2402	1200 Watt / 24V Front End power Supply Module
1U100SB	3 Bay / 1U High Power Shelf (14.60" Depth)
BP-3A-1U	Blank Faceplate

Mechanical Drawing:

See Engineering Specification for complete details including connector and pin assignments

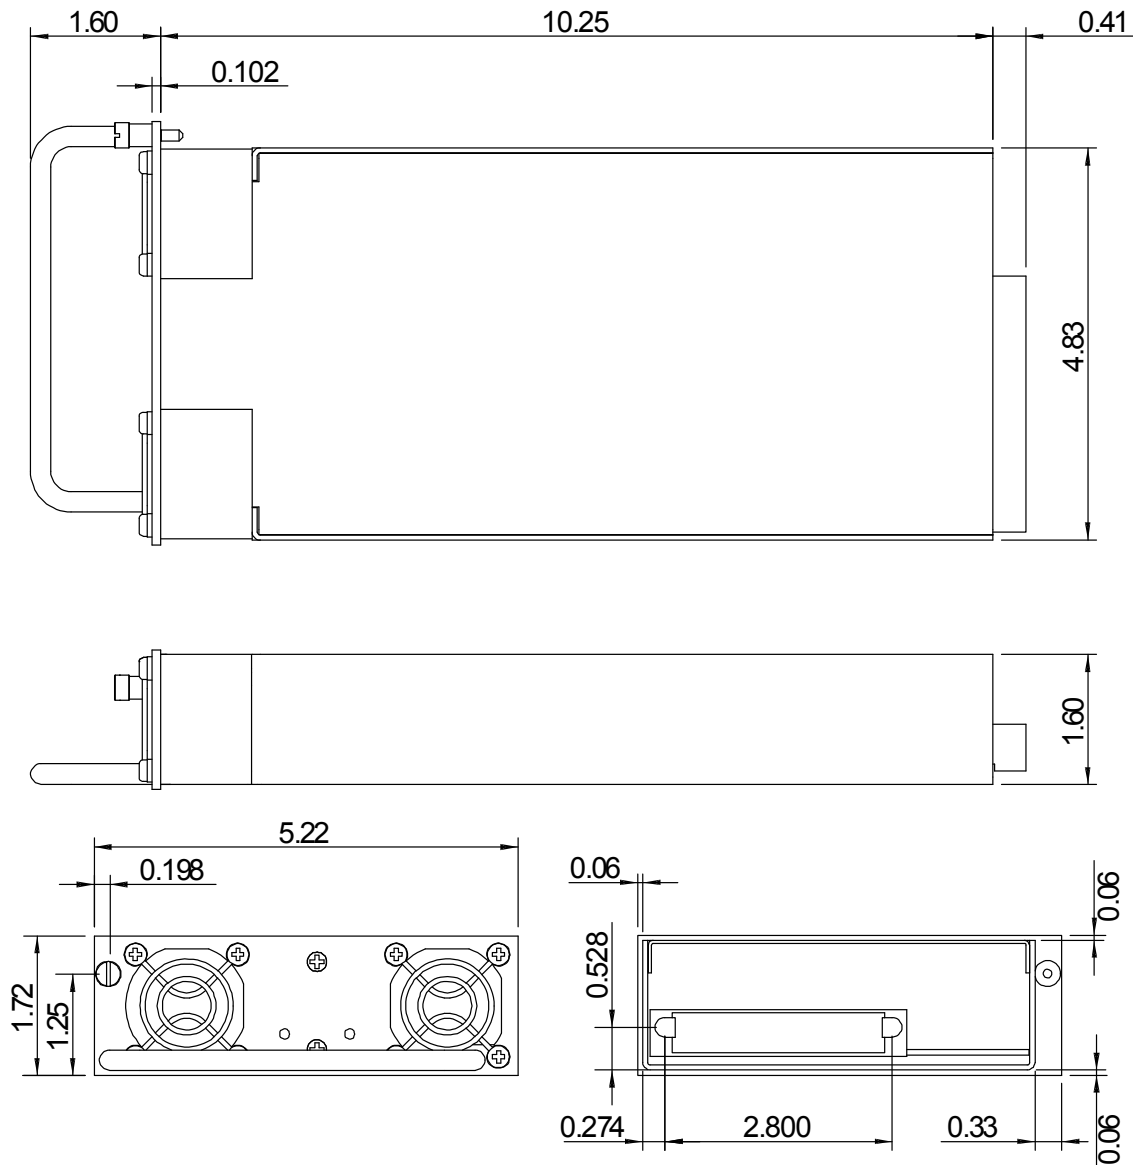

Please see our website for the complete engineering specification. The information and specifications contained herein are subject to change without notice.

USA

1500 E. Hamilton Ave. #118
Campbell, CA 95008 USA
tel: 408.369.2200
fax: 408.369.4911

Canada

1810 Birchmount Road
Toronto, ON M1P 2H7
tel: 416.298.0560
fax: 416.298.0806

Hong Kong

CDW Bldg, Blk D, 22F, 388
Castle Peak Rd.
Tsuen Wan N.T., Hong Kong
tel: 2411 3623, 2411 3624

www.saepower.com